

FEP-0811 Version: 2



8-Port Fast Ethernet PoE-Plus Switch, 123.2W

The LevelOne FEP-0811 provides 8 x 10/100Mbps ports with IEEE 802.3at PoE plus supported. This switch is IEEE 802.3at/af compliant, and provides power and data over a single Ethernet cable to any PoE device, with total power budget of 123.2W, up to 30W per port. Ideal for desktops and it is also 19-inch rack-mountable, which provides convenient and flexible installation. The FEP-0811 is designed for small businesses that prefer an affordable solution for PoE deploying infrastructure.



1. LED Indicators
2. 10/100Mbps RJ-45 PoE Ports
3. Power On / Off Switch
4. Power Socket

Key Features

- IEEE-802.3af / at PoE kompatibel zur einfachen Verwendung und Installation
- Automatische Erkennung und Schutz von Nicht-Standard-PoE-Geräten
- 10/100 Mb/s, Voll/Halb-Duplex, Auto-Negotiation, Auto-MDI/MDIX
- 11 Zoll Metallgehäuse mit beiliegendem Montagesatz für 19 Zoll Racks
- IEEE-802.3x-Überwachung schützt vor verloren gegangenen Paketen und sorgt für zuverlässige Datenübertragung
- Gesamt-PoE-Leistung: 123,2 W, bis zu 30 W pro Port
- Interne Stromversorgung

Specifications

System Specifications

Buffer Memory (KB):

64KB

Connectors and Cabling:

8 x 10/100Base-TX RJ-45 PoE Ports
 10Base T Cat. 3, 4, 5 UTP/STP
 100Base TX Cat. 5 UTP/STP

Button:

Power On / Off Switch

Indicator:



Power, Active, 10/100M, PoE

Transmission Method:

Store-and-Forward

Power:

Power Consumption: < 130W

Power Input: 100-240V AC, 50-60 Hz, 2A Internal Power Supply

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3x Full-duplex Flow Control

IEEE 802.3af Power over Ethernet (PoE)

IEEE 802.3at Power over Ethernet Plus (PoE+)

Features

PoE:

Power Budget: Max. 123.2W

PoE Standard: IEEE 802.3af/at Power over Ethernet / PSE

PD classification identity

PoE over current protection

PoE circuit sorting protection

PoE Power Output: Per Port 56V DC, Max. 15.4 watts (802.3af)

or 30 watts (802.3at)

Power Pin Assignment: 1/2(+), 3/6(-)

Performance

Backplane (Gbps):

1.6Gbps

MAC Address Table:

1K

Data Transfer Rate:

10/100Mbps

Packet Forwarding Rate:

100Mbps port - 148,000pps

10Mbps port - 14,880pps

Environment

Temperature (°C):

Operating: 0°C ~ 45°C

Storage: - 40°C ~ 70°C

Humidity (Non-condensing):

Storage: 10% ~ 90%

Operating: 10% ~ 90%

Physical Specifications

Dimensions (W x D x H mm):

185 x 280 x 44 mm

Weight (g):

1600 g

Others


Approval and Compliance:

FCC, CE

Deployment:

Desktop and 19-inch rack-mountable

Diagramm

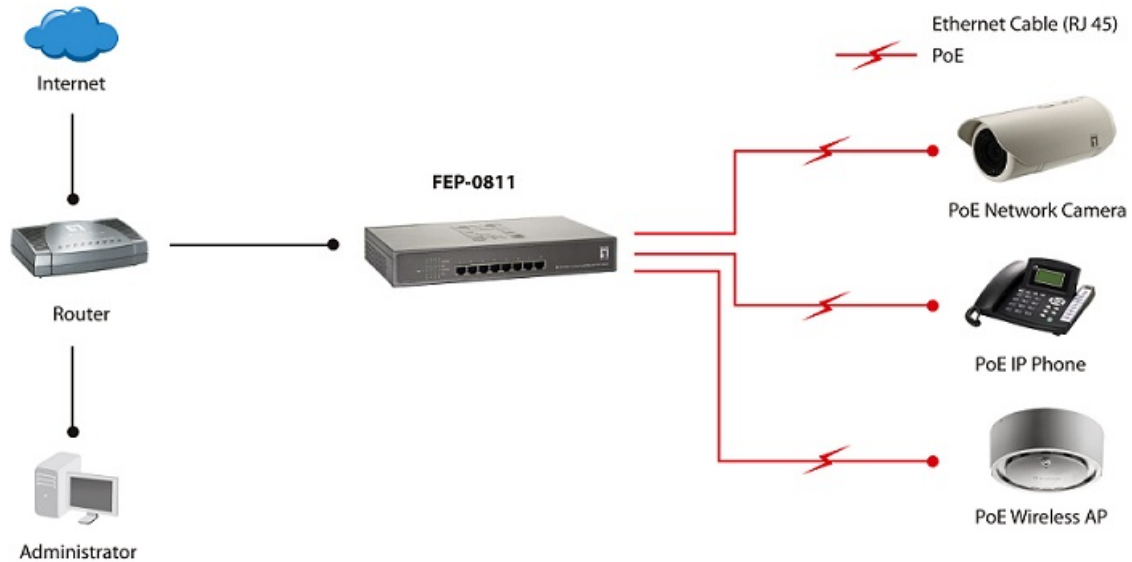

Order Information

FEP-0811

Package Contents

- Stromkabel
- 19" Einbaurahmen
- Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.



All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.